

## marine generator family by **norpro**

### Model **60NI** 60kW

EPA Certified

#### Main Specifications

AC Output.....60 kW, 60 Hz, 1800 RPM, 3 Ph, 120/240V  
Voltage Regulation (Marathon).....+1%

#### Engine: ISUZU Diesel Model 4BG1T

Type.....4 cyl., 4 cycle, water cooled, OHV  
Fuel System.....direct injected  
Bore & Stroke (in.).....4.13 x 4.92  
Piston Displacement (cu.in.).....262  
Compression Ratio.....17:1  
Coolant Capacity (Block qts.).....9.0  
Lube Oil Capacity (qts.).....13.74  
dB(A) @ 7 meter w/o intake & exhaust attenuated.....92  
Fuel Consumption at Full Load (gph).....7.50

Warranty.....5 year 5000 hour

#### Standard Features


Starter.....12V  
Exhaust Manifold.....Water Cooled  
Heat Exchanger Cooled.....Cupro-Nickel  
Exhaust Elbow.....Water-Cooled  
Oil Pan.....30° Inclination All Directions  
Auto Shutdown.....Low Oil Pressure/High Water Temp  
Harness Extension.....10 Foot  
Panel w/Gauges.....Remote Mount  
Belt Guard.....ABS Molded  
Paint Color.....Ultra White



(Some options may be shown)

#### Generator Standard Features

- External regulator system incorporates electronic circuit to best meet user needs
- Maximum 1% or better voltage deviation
- Brushless design minimizes maintenance and service costs
- Manufactured with class "F" or better insulation as defined by applicable NEMA standard
- Body rigidly coupled to the engine, driven with a steel wheel disc-type coupling for permanent alignment
- Single piece four pole rotor lamination for strength and lasting durability
- Wet layer wound field on pole for maximum protection against short circuit
- Direct drive centrifugal blower
- Three phase, 60 Hz, 0.8 PF
- **2 year/1000 hour warranty on generator**

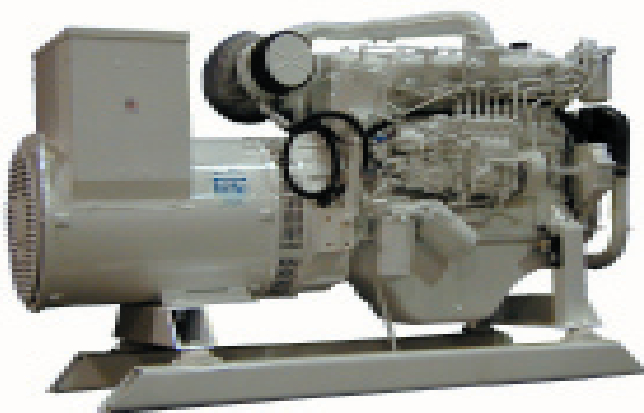

**Delivering excellence one generator at a time**

## MODEL 60NI



### Optional Equipment

- Extension harnesses in 5', 10', 20' and 50' lengths
- Dual station instrument panel with "Y" harness
- Dry exhaust
- Keel cooling
- Sound enclosure

Standard



Optional



MODEL	LENGTH	WIDTH	HEIGHT	DRY WEIGHT	ENCLOSURE (LxWxH)
4NI	28"	14"	18.5"	129 lbs	31.7"x16"x19"
6NI	30"	20"	22"	379 lbs	35.6"x23"x25"
9NI	32"	20"	22"	446 lbs	35.6"x23"x25"
12NI	35.5"	20"	24.5"	527 lbs	39.5"x23"x26"
14NI	35.5"	20"	24.5"	539 lbs	39.5"x23"x26"
18NI	37"	20"	25.5"	596 lbs	45.5"x23"x26"
21NI	42"	20"	25.5"	742 lbs	45.5"x23"x26"
30NI	50"	25"	33"	934 lbs	N/A
40NI	59"	25"	36"	1526 lbs	N/A
60NI	68"	25"	38"	1900 lbs	N/A
84NI	68"	25"	38"	2180 lbs	N/A
99NI	68"	25"	38"	2810 lbs	N/A
120NI	68"	25"	38"	2850 lbs	N/A

Authorized Sales & Service Dealer