

## marine generator family by **norpro**

Model **7NI** 7kW


EPA Certified

### Main Specifications

AC Output.....7 kW, 60 Hz, 1800 RPM, 1 Ph, 120/240V  
Voltage Regulation (Marathon).....+5%  
Amps @ 120/240.....58.3/29

### Engine: ISUZU Diesel Model 3CA

Type...3 cyl.....4 cycle, water cooled, OHV  
Fuel System.....indirect injected  
Bore & Stroke (in.).....2.75 x 2.91  
Piston Displacement (cu. in.).....54.9  
Compression Ratio.....23.5:1  
Coolant Capacity (Block qts.).....0.95  
Lube Oil Capacity (qts.).....2.95  
dB(A) @ 7 meter w/o intake & exhaust attenuated.....75  
dB(A) @ 7 meter w/sound shield & muffler.....55  
Fuel Consumption at full load.....1GPH

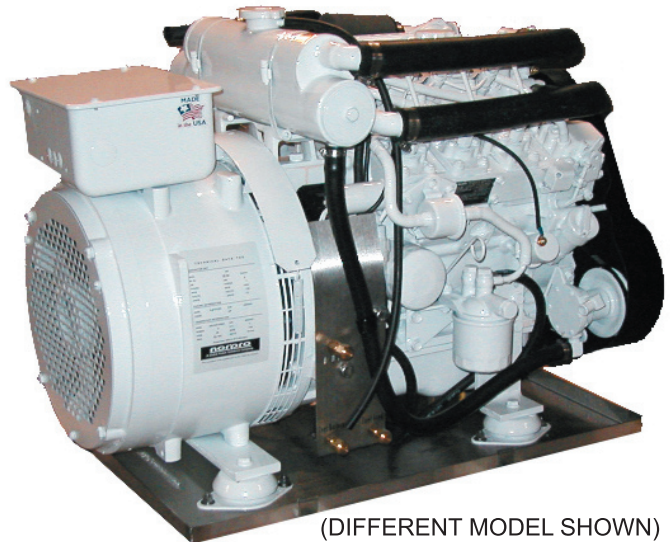

(DIFFERENT MODEL SHOWN)

### Standard Features

Starter.....12V  
Exhaust Manifold.....Water Cooled  
Heat Exchanger Cooled.....Cupro-Nickel  
Exhaust Elbow.....Water-Cooled  
Drip Pan.....Welded Stainless Steel  
Oil Pan.....15° Inclination All Directions  
Auto Shutdown.....Low Oil Pressure/High Water Temp  
Fuel Plate w/ oil drian kit.....Stainless Steel  
Harness Extension.....10 Foot  
Panel w/Gauges.....Remote Mount  
Belt Guard.....ABS Molded  
Paint Color.....Ultra White

Complete teardown in only 5 minutes;  
3 removeable access panels provide an easy and accessible work area

Powder coated gloss white aluminum sound shield

State of the art design with a world class finish.

Connection holes & exhaust port make for a neat and clean installation.



Full sound abatement with an amazing 55 db(A) noise level at full load.

### Generator Standard Features

- External regulator system incorporates capacitor circuit to best meet user needs
- Maximum 5% or better voltage deviation
- Brushless design minimizes maintenance and service costs
- Manufactured with class "F" or better insulation as defined by applicable NEMA standard
- Body rigidly coupled to the engine, driven with a steel wheel disc-type coupling for permanent alignment
- Single piece four pole rotor lamination for strength and lasting durability
- Wet layer wound field on pole for maximum protection against short circuit
- Direct drive centrifugal blower
- Single phase, 60 Hz, 1.0 PF

### Warranty Information

5 Year/5000 hour genset warranty



Delivering excellence one generator  at a time

## MODEL 7NI

### Optional Equipment

- Heat Exchanger Cooling (5-120NI)
- Digitec 100 or 300 Control Panels
- Analog 100 Control Panel
- Remote Start
- Dual Station Analog Panels with "Y" Harness
- 5', 10', 20, or 50' Harness Extensions
- Raw Water Pump
- Sound Shield
- Electric Blue or Pewter Grey Paint

Standard      Optional

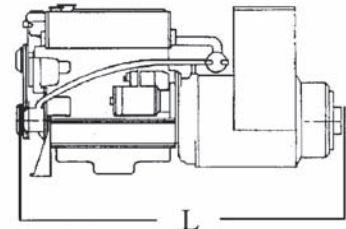

MODEL	LENGTH	WIDTH	HEIGHT	DRY WEIGHT	ENCLOSURE (LxWxH)	
4N	28"	14"	18.5"	129 lbs	31.5"x16"x19"	
7NI	DIMENSIONS NOT YET AVAILABLE					36.5"x23"x24.5"
9NI	DIMENSIONS NOT YET AVAILABLE				527 lbs	36.5"x23"x24.5"
13NI	35.5"	20"	24.5"	596 lbs	41"x23"x27.5"	
17NI	37"	20"	25.5"	742 lbs	46"x23"x26.5"	
21NI	42"	20"	25.5"	1900 lbs	46"x23"x26.5"	
60NI	68"	25"	38"	2180 lbs	N/A	
84NI	68"	25"	38"	2810 lbs	N/A	
99NI	68"	25"	38"	2850 lbs	82"x35"x40"	
120NI	68"	25"	38"		82"x35"x40"	

Authorized Sales & Service Dealer